


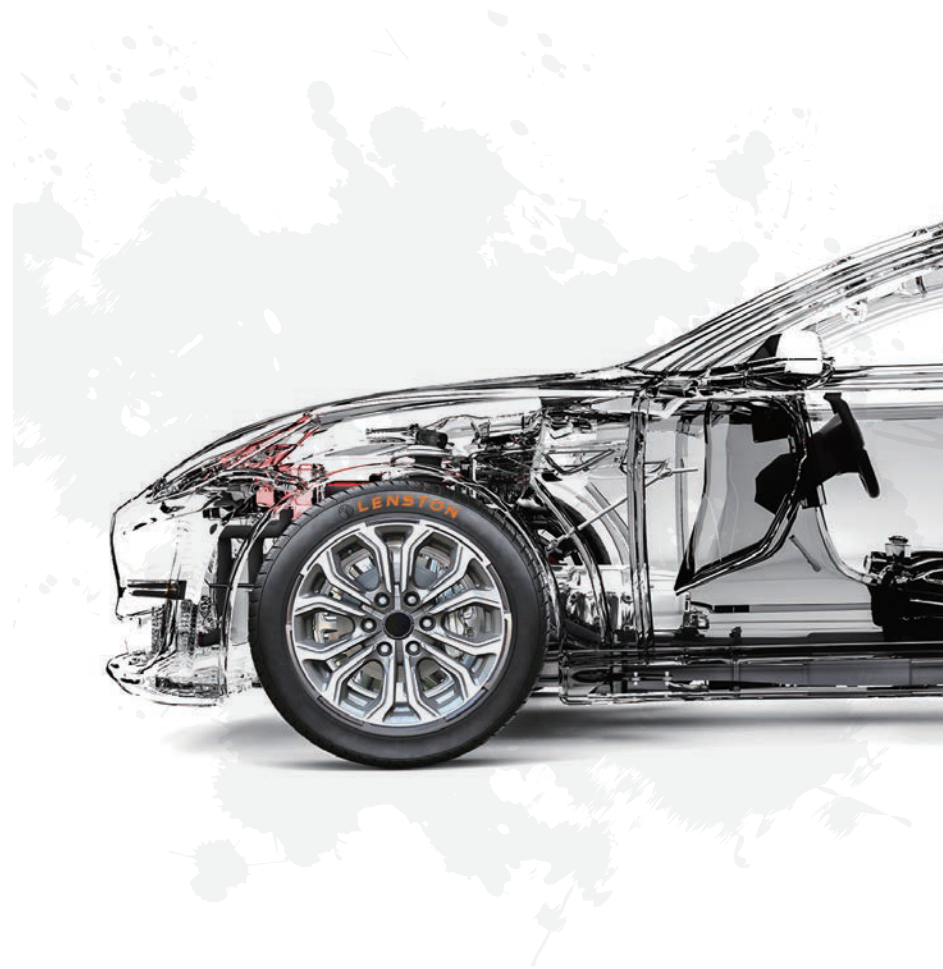

PRODUCT BROCHURE

» TRMPSON TYRE CO., LTD

TRMPSON TYRE CO., LTD

ADDRESS: ROOM 2206-2207, BUILDING 4, No.1 XIANGLING ROAD,
LAOSHAN DISTRICT, QINGDAO, CHINA

E-mail: info@trmpsontyre.com

Website: www.trmpsontyre.com

Tel: +86 0532-88903988



THE INTRODUCTION OF
GERMANY BRAND LENSTON
TIRE



CONTENTS

LENSTON
Company Introduction

- 

The inheritance of Germanic nation - Germany brand LENSTON, which traced back to year 1988, is a high-end brand focusing on UHP and SUV tires, coming from Germany that represents technology and quality.
- 

LENSTON is committed to the tire pattern and structure design in strict accordance with international standards, and implements stringent security criterion to research and develop tires. To provide owners the most secure tires, LENSTON passed a series of international certifications, including the European ECE, American DOT, Gulf countries GCC.
- 
- 

In order to adapt to the clients and market preference, all the patterns adopt the latest design, and the German technical team make the final decision after many simulation experiments and modification. Meanwhile, the product structure and technical indicators are through a full range of marketing research to maximize the market and customer demands.
- 

To adapt to the ever-changing market and developing times, LENSTON imported the tire-coloring technology in China in 2016, leading the fashion trend in tire industry. After years of research and test by technical team, tires with colored sidewall are manufactured successfully. Furthermore, LENSTON is capable of making exclusive tires for owners combining with laser-engraving technique, to achieve "private customization" absolutely and subvert the age of black tire!
- 

LENSTON tire - taking you to start a colorful journey, leading tire to a beautiful future!

LENSTON
PRODUCT DESCRIPTION

EAGLE High performance tire series	03-12
ELEPHANT Light truck tire series	13-14
PUMA Off-road/SUV tire series	15-18
ALL TERRAIN	19-22
WHITE SIDE/WHITE LETTER TIRE SERIES	23-24
PRIVATE ORDER TIRE SERIES	25-26

 LENSTON
L100+



 Tire introduction

- Adopt the asymmetric pattern design, effectively improve the steering when turning.
- The continuous cap ply fastens the edge of the belt ply under the condition of high-speed driving, so as to maintain the durability and high-speed performance during driving.
- Adopt the special design of wear-resistant tread, improve the service life of tires.

 Main feature



ASYMMETRIC PATTERN DESIGN

Adopt the asymmetric pattern design, effectively improve the steering when turning



CONTINUOUS GROWN LAYER

The continuous cap ply fastens the edge of the belt ply under the condition of high-speed driving, so as to maintain the durability and high-speed performance during driving



WEAR RESISTANT TREAD FORMULA

Adopt the special design of wear-resistant tread, improve the service life of tires

 Tire introduction

SERIES

50/55/60/65

INCH

15/16

SPEED RANGE

H/T/W

 Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE	DOUBLE				
195/55R15	85	H	6J	201	595	515	1135	/	/	300	44
185/60R15	84	H	5.5J	189	603	500	1102	/	/	300	44
195/60R15	88	H	6J	201	615	560	1235	/	/	300	44
205/60R15	91	H	6J	209	627	615	1356	/	/	300	44
185/65R15	88	T	5.5J	189	621	560	1235	/	/	300	44
195/65R15	91	H	6J	201	635	615	1356	/	/	300	44
205/65R15	94	H	6J	209	647	670	1477	/	/	300	44
215/65R15	96	H	6 1/2J	221	661	710	1565	/	/	300	44
195/50R16	84	H	6J	201	602	500	1102	/	/	300	44
195/55R16	87	H	6J	201	620	545	1201	/	/	300	44
205/55R16	91	H	6.5J	214	632	615	1356	/	/	300	44
215/55ZR16	97	W	7J	226	642	730	1609	/	/	340	50
195/60R16	89	H	6J	201	640	580	1279	/	/	300	44
205/60R16	92	H	6J	209	652	630	1389	/	/	300	44
215/60R16	95	H	6.5J	221	664	690	1521	/	/	300	44
225/60R16	98	H	6.5J	228	676	750	1653	/	/	300	44
215/65R16	98	H	6.5J	221	686	750	1653	/	/	300	44





L108



Tire introduction


- The compound tread reduces rolling resistance improves fuel efficiency, more energy-saving and environmental protection.
- Scientific and reasonable design of pattern and groove makes the tire more safe, anti-wet and slippery, and ensures high speed stability and safety.

Main feature




FOUR LONGITUDINAL GROOVES

Effectively improve the safety of the tires, ensure high-speed driving, while enhancing the drainage and wet skid resistance of the tires



UNEQUAL PITCH ARRANGEMENT

It can not only greatly reduce the resonance coefficient, effectively reduce the noise, but also improve the comfort of tires



DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

It is good to improve the tire drainage, maintain better gnp, and increase the safety of braking



COMPOUND TREAD

It is beneficial to reduce the rolling resistance of the tire, improve the fuel utilization rate, and achieve the effect of saving fuel and environmental protection

Tire introduction

SERIES

55/60/65/70

INCH

13/14/15/16

SPEED RANGE

H/T/V



Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE	DOUBLE				
165/70R 13	79	T	5.00B	170	562	437	963	/	/	300	44
175/70R13	82	T	5.00B	177	576	475	1047	/	/	300	44
185/70R13	86	T	5 1/2J	189	590	530	1168	/	/	300	44
165/60R14	75	H	5J	170	554	387	853	/	/	300	44
185/60R14	82	H	5 1/2J	189	578	475	1047	/	/	300	44
175/65R14	82	T	5J	177	584	475	1047	/	/	300	44
185/65R14	86	H	5 1/2J	189	596	530	1168	/	/	300	44
165/70R14	81	T	5.00B	170	588	462	1019	/	/	300	44
175/70R14	84	H	5.00B	177	602	500	1102	/	/	300	44
185/70R14	88	T	5 1/2J	189	616	560	1235	/	/	300	44
195/70R14	91	H	6J	201	630	615	1356	/	/	300	44
205/70R14	98	T	6J	209	644	750	1653	/	/	340	50
195/55R15	85	V	6J	201	595	515	1135	/	/	300	44
185/60R15	84	H	5 1/2J	189	603	500	1102	/	/	300	44
195/60R15	88	H	6J	201	615	560	1235	/	/	300	44
185/65R15	88	H	5 1/2J	189	621	560	1235	/	/	300	44
195/65R15	91	V	6J	201	635	615	1356	/	/	300	44
205/65R15	94	H	6J	209	647	670	1477	/	/	300	44
205/55R16	91	H	6 1/2J	214	632	615	1356	/	/	300	44
195/60R16	89	H	6J	201	640	580	1279	/	/	300	44
205/60R16	92	H	6J	209	652	630	1389	/	/	300	44
215/60R16	95	H	6 1/2J	221	664	690	1521	/	/	300	44
215/65R16	98	H	6 1/2J	221	686	750	1653	/	/	300	44

L188



Tire introduction

- Directional continuous rib at the center of the cap ply ensures the straight line stability of the tire.
- Wide tread design, ground surface enlargement, driving smoothly, increase driving mileage.
- Adopt the special wear-resistant tread design, effectively improve the service life of tires.
- The green tread can reduce the rolling resistance coefficient, make it more environment-friendly and fuel saving, and bring you pleasant driving pleasure.

Main feature



CAP PLY CONTINUOUS RIB

Directional continuous rib at the center of the cap ply ensures the straight line stability of the tire



WIDE TREAD DESIGN

Wide tread design, ground surface enlargement, driving smoothly, increase driving mileage



GREEN TREAD FORMULA

The green tread can reduce the rolling resistance coefficient, make it more environment-friendly and fuel saving, and bring you pleasant driving pleasure

Tire introduction

SERIES	50/55/60/65/70/75
INCH	12/13/14/15/16
SPEED RANGE	H/T/V



Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE		DOUBLE			
145/70R12	69	T	4.50B	150	509	325	716	/	/	300	44
155/70R12	73	T	4.50B	157	523	365	805	/	/	300	44
165/70R12	77	T	5.00B	170	537	412	908	/	/	300	44
175/70R12	80	T	5.00B	177	551	450	992	/	/	300	44
165/55R13	70	T	5.00B	170	512	335	739	/	/	300	44
145/60R13	66	T	4.50B	150	504	300	661	/	/	300	44
165/65R13	77	T	5.00B	170	544	412	908	/	/	300	44
175/65R13	80	T	5.00B	177	558	450	992	/	/	300	44
155/50R14	67	T	5.00B	162	510	307	677	/	/	300	44
185/65R14	86	H	5 1/2J	189	596	530	1168	/	/	300	44
205/75R14	95	T	5 1/2J	203	664	690	1521	/	/	300	44
165/65R15	81	T	5.00B	170	595	462	1019	/	/	300	44
195/65R15	91	V	6J	201	635	615	1356	/	/	300	44
225/70R15	100	T	6 1/2J	228	697	800	1764	/	/	300	44
205/75R15	97	T	5 1/2J	203	689	730	1609	/	/	300	44
215/75R15	100	T	6J	216	703	800	1764	/	/	300	44
225/75R15	102	T	6J	223	719	850	1874	/	/	300	44
235/75R15	105	T	6 1/2J	235	733	925	2039	/	/	300	44
215/60R16	95	H	6 1/2J	221	664	690	1521	/	/	300	44
205/65R16	95	T	6.00B	209	672	690	1521	/	/	300	44


L600



Tire introduction


- EAGLE L600 is dynamically designed, presents high speed, safety and driving pleasure. Perfect performance and handling control for speed addicts with special profile.
- Maximum grip in bends on wet and dry surfaces. Wide area of use from sport cars to luxury vehicles with high-tech structure and esthetic appearance.

Main feature




FOUR LONGITUDINAL GROOVES

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



UNEQUAL PITCH ARRANGEMENT

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed.



DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

The state-of-art asymmetric design on the inner and outer sides breaks traditional rules, improves the freedom of tire mounting.



COMPOUND TREAD

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Tire introduction

SERIES

50/60/65/70/75

INCH

15/16/17/18

SPEED RANGE

S/T

Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE
						SINGLE	DOUBLE			
205/60R15	91	V	6J	209	627	615	1356	/	/	300
205/55R16	91	V	6½J	214	632	615	1356	/	/	300
185/65R14	86	H	5½J	189	596	530	1168	/	/	300
185/70R14	88	H	5½J	189	616	560	1235	/	/	300
185/60R15	84	H	5½J	189	603	500	1102	/	/	300
195/55R15	85	V	6J	201	595	515	1135	/	/	300
215/50R18	92	V	7J	226	673	630	1389	/	/	300
205/50ZR17	93	W	6½J	214	638	650	1433	/	/	340
225/55ZR17	97	W	7J	233	680	730	1609	/	/	300
195/55R16	87	V	6J	201	620	545	1202	/	/	300
215/55ZR17	98	W	7J	226	668	750	1653	/	/	340
225/55ZR18	102 XL	W	7J	233	705	850	1874	/	/	340
195/50R15	82	V	6J	201	577	475	1047	/	/	300
195/60R15	88	V	6J	201	615	560	1235	/	/	300
205/60R16	92	V	6J	209	652	630	1389	/	/	300
185/65R15	88	H	5½J	189	621	560	1235	/	/	300
215/60R17	96	H	6½J	221	690	710	1565	/	/	300
225/65R17	102	H	6½J	228	724	850	1874	/	/	300
215/60R16	95	V	6½J	221	664	690	1521	/	/	300
215/50ZR17	95 XL	W	7J	226	648	690	1521	/	/	300
205/55R17	91	W	6½J	214	658	615	1356	/	/	300
225/60R18 XL	104	V	6½J	228	727	900	1984	/	/	340

 LENSTON
L300+


L300+



 Tire introduction

- Optimized asymmetric pattern
- Four optimal wide grooves
- Continuous cap ply
- Low noise formula
- Rim protection design

 Main feature



OPTIMIZED ASYMMETRIC PATTERN

Optimized asymmetric pattern provide better performance for controlling and drainage in all road condition




FOUR OPTIMAL WIDE GROOVES

Four optimal wide grooves provide better drainage performance on mud road, prevent side sliding efficiently, improve the wet traction performance effectively



CONTINUOUS CAP PLY

The continuous cap ply fasten the belt edge area at high speeds, to maintain long-lasting performance and high speed performance while driving



LOW NOISE FORMULA

Low noise formula effectively reduce the noise when driving



RIM PROTECTION DESIGN

Rim protection design avoid the curb rubbing the rim

 Tire introduction

SERIES

35/40/45/50/55

INCH

17/18/19/20/21

SPEED RANGE

W

 Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE	DOUBLE				
225/55ZR16	99	W	7J	233	654	775	1709	/	/	340	50
215/45R17	91	W	7J	213	626	615	1356	/	/	340	50
225/45ZR17	94	W	7 1/2J	225	634	670	1477	/	/	340	50
235/45R17	97	W	8J	236	644	730	1609	/	/	340	50
245/45ZR17	99	W	8J	243	652	775	1709	/	/	340	50
205/50R17	93	W	6.5J	214	638	650	1433	/	/	340	50
215/50R17	95	W	7J	226	648	690	1521	/	/	340	50
225/50ZR17	98	W	7J	233	658	750	1653	/	/	340	50
235/50ZR17	100	W	7 1/2J	245	668	800	1764	/	/	340	50
215/55R17	98	W	7J	226	668	750	1653	/	/	340	50
225/55R17	101	W	7J	233	680	825	1819	/	/	340	50
235/55R17	103	W	7.5J	245	690	875	1929	/	/	340	50
225/40ZR18	92	W	8J	230	637	630	1389	/	/	340	50
235/40ZR18	95	W	8 1/2J	241	645	690	1521	/	/	340	50
245/40R18	97	W	8.5J	248	653	730	1609	/	/	340	50
255/40ZR18	99	W	9J	260	661	775	1709	/	/	340	50
215/45ZR18	93	W	7J	213	651	650	1433	/	/	340	50
225/45ZR18	95	W	7 1/2J	225	659	690	1521	/	/	340	50
235/45ZR18	98	W	8J	236	669	750	1653	/	/	340	50
245/45R18	100	W	8J	243	677	800	1764	/	/	340	50
255/45ZR18	103	W	8 1/2J	255	687	875	1929	/	/	340	50
235/35ZR19	91	W	8 1/2J	241	647	615	1356	/	/	340	50
225/40ZR19	93	W	8J	230	663	650	1433	/	/	340	50
235/40ZR19	96	W	8 1/2J	241	671	710	1565	/	/	340	50
245/40ZR19	98	W	8 1/2J	248	679	750	1653	/	/	340	50
255/40ZR19	100	W	9J	260	687	800	1764	/	/	340	50
275/40ZR19	105	W	9 1/2J	278	703	925	2039	/	/	340	50
225/45ZR19	96	W	7 1/2J	225	685	710	1565	/	/	340	50
245/45ZR19	102	W	8J	243	703	850	1874	/	/	340	50
255/45ZR19	104	W	8 1/2J	255	713	900	1984	/	/	340	50
275/45ZR19	108	W	9J	273	731	1000	2205	/	/	340	50
275/40R20	106	W	9 1/2J	278	728	950	2094	/	/	340	50
245/45ZR20	103	W	8J	243	728	875	1929	/	/	340	50
255/45ZR20	105	W	8 1/2J	255	738	925	2039	/	/	340	50
275/45ZR20	110	W	9J	273	756	1060	2337	/	/	340	50
275/45ZR21	110	W	9J	273	781	1060	2337	/	/	340	50

 ELEPHANT
L200



 Tire introduction


- Longitudinal winding grooves ensure better traction in high speed
- Deep grooves design improve mileage
- Excellent wear resistance play a strong driving power on the wet/mud road

 Main feature



THREE WINDING SIPES

Enhance water evacuation, improve traction in wet condition with the design of lateral block pattern



WIDE TREAD DESIGN

Enlarge landing area, keep stable and improve wear resistance



MEW RUBBER FORMULA

Provide better wear resistance, save energy and more environmental



TIRE CARCASS REINFORCE

Reinforce carcass structure and adopt special formula, to achieve excelent load capacity and be more economic

L200

 Tire introduction

SERIES

70

INCH

12/13/14/15

SPEED RANGE

N/K/P/Q/R/S



 Specification List

SIZE	P.R	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
							SINGLE		DOUBLE			
155R12C	6PR	83/81	N	4.50B	157	550	560	1235	530	1168	450	65
165R13C	6PR	91/89	P	4.50B	167	596	615	1360	580	1280	375	54
165R14C	6PR	93/91	P	4 1/2J	167	596	650	1430	615	1360	375	54
185R15C	8PR	103/102	Q	5 1/2J	188	674	875	1929	850	1874	450	65
175R13C	8PR	97/95	Q	5.00B	177	610	730	1609	690	1521	450	55
175/70R14C	8PR	95/93	S	5J	177	602	690	1521	650	1433	375	54
185R14C	8PR	102/100	R	5 1/2J	188	650	850	1874	800	1764	450	65
195R14C	8PR	106/104	R	5 1/2J	198	666	950	2094	900	1984	450	65
205R14C	8PR	109/107	Q	6J	208	686	1030	2271	975	2149	450	65
195R15C	8PR	106/104	R	5 1/2J	198	690	950	2094	900	1984	450	65
195/70R15C	8PR	104/102	R	6J	201	655	900	1984	850	1874	450	65
205/70R15C	8PR	106/104	R	6J	209	669	950	2094	900	1984	450	65
215/70R15C	8PR	109/107	R	6 1/2J	221	683	1030	2271	975	2149	450	65
225/70R15C	8PR	112/110	R	6 1/2J	228	697	1120	2469	1060	2337	450	65
5.00R12LT	10PR	87/85	K	3.50B	143	568	545	1201	515	1135	450	65

L500



Tire introduction

- Excellent braking and handling performance on wet road adapt to city and country road condition
- The perfect integration of comfort, quietness and off-road let it be possible to enjoy the pleasure of sports and cross-country

Main feature



3D PATTERN BLOCK DESIGN

Provide good traction performance on pavement and non-pavemen



FOUR WIDE STRAIGHT GROOVES

Provide better drainage performance on mud road, prevent side sliding efficiently



SPECIAL WEAR-PROOF STRIP DESIGN

Enhance the stability while making a turn in a high speed

Tire introduction

SERIES	45/50/55/60/65
INCH	17/18/19/20
SPEED RANGE	V/W



Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE	DOUBLE				
215/60R17	96	V	6 1/2J	221	690	710	1565	/	/	300	44
225/60R17	99	V	6 1/2J	228	702	775	1709	/	/	300	44
225/65R17	102	V	6 1/2J	228	724	850	1874	/	/	300	44
235/65R17	104	V	7J	240	738	900	1984	/	/	300	44
235/50R18	97	V	7 1/2J	245	693	825	1819	/	/	340	50
225/55R18	98	V	7J	233	705	750	1653	/	/	300	50
235/55R18	104	W	7 1/2J	245	715	900	1984	/	/	340	50
255/55R18	109	W	8J	265	737	1030	2271	/	/	340	50
225/60R18	100	V	6.5	228	727	800	1764	/	/	300	44
235/60R18	107	V	7J	240	739	975	2149	/	/	340	50
235/50ZR19	103	W	7 1/2J	245	719	875	1929	/	/	340	50
255/50R19	107	W	8J	265	739	975	2149	/	/	340	50
265/50R19	110	V	8 1/2J	277	749	1060	2337	/	/	340	50
235/55R19	105	V	7 1/2J	245	741	925	2039	/	/	340	50
245/55R19	103	W	7 1/2J	253	753	875	1929	/	/	300	44
235/55ZR20	105	W	7 1/2J	245	766	925	2039	/	/	340	50
255/55ZR20	110	W	8J	265	788	1060	2337	/	/	340	50
275/45R20	110	W	9J	271	756	1090	2337	/	/	340	50


 PUMA
L550



 Tire introduction


- Adopt non-directional block design to improve grip.
- Variable pitch design reduces road noise and provides a more comfortable ride environment.
- Use high-strength belt to improve the impact resistance of the tire.
- High-strength apex, which gives the tire a higher stability and steering response

 Main feature




NON-DIRECTIONAL BLOCK DESIGN

Non-directional block design for improved grip



VARIABLE PITCH DESIGN

Variable pitch design reduces road noise and provides a more comfortable ride



HIGH-STRENGTH BELT

The high-strength belt layer is used to improve the impact resistance of the tire



HIGH STRENGTH APEX

High-strength apex, giving the tire a higher stability and steering response

L550

 Tire introduction

SERIES

60/65/70

INCH

16/17

SPEED RANGE

T/V



 Specification List

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE		
						SINGLE		DOUBLE				
215/70R16	100	T	6 1/2J	708	221	800	1764	/	/	/	300	44
215/60R17	96	V	6 1/2J	690	221	710	1565	/	/	/	300	44
225/65R17	102	V	6 1/2J	724	228	850	1874	/	/	/	300	44


ALL TERRAIN
L700



Tire introduction


- The best choice for ALL TERRAIN cross-country enthusiasts
- Excellent traction and sport performance not only on pavement but on non-pavement (mountain/mud/icy road, etc)

Main feature



FOUR WIDE MAIN GROOVES

Enhance excellent drainage and handling in wet and smooth condition



SMALL PATTERN SIPES

Enhance comfort and traction performance on wet road



SHOULDER BLOCK BRIDGE DESIGN

Increase blocks' rigidity, prevent the shoulder partially worn out



RIM PROTECTION DESIGN

Avoid the curb rubbing the rim while parking

Tire introduction

SERIES

50/60/65/70/75

INCH

15/16/17/18

SPEED RANGE

S/T



Specification List

SIZE	P.R	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
							SINGLE		DOUBLE			
P215/75R15	/	100	S	6J	216	703	800	1764	/	/	300	44
LT215/75R15	6PR	100/97	S	6J	216	703	800	1760	730	1610	350	51
P235/75R15	XL	109	S	6 1/2J	235	733	1030	2271	/	/	340	50
LT235/75R15	6PR	104/101	S	6 1/2J	235	733	900	1980	825	1820	350	51
235/70R16	/	106	T	7J	240	736	950	2094	/	/	300	44
LT235/70R16	6PR	104/101	S	7J	240	736	900	1980	825	1820	350	51
245/70R16	/	107	T	7J	248	750	975	2149	/	/	300	44
LT245/70R16	6PR	106/103	S	7J	248	750	950	2090	875	1930	350	51
265/70R16	/	112	T	8J	272	778	1120	2469	/	/	300	44
LT265/70R16	6PR	110/107	S	8J	272	778	1060	2340	975	2150	350	51
LT245/75R16	10PR	120/116	S	7J	248	774	1400	3080	1250	2760	550	80
225/65R17	/	102	S	6 1/2J	228	724	850	1874	/	/	300	44

ALL TERRAIN
FIGHTER AT



FIGHTER AT

 Tire introduction

SERIES	50/60/65/70/75
INCH	15/16/17/18
SPEED RANGE	S/T

 Specification List

SIZE	LI/SS	P.R	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG)		MAX.PRESSURE		STANDARD RIM (J)
					SINGLE	DUAL	KPA	P.S.I	
175/80R14	102/99Q	6PR	200	650	850	775	350	50	6
205/65R15	102/99Q	8PR	205	660	850	775	450	65	6
205/70R15	102/99Q	8PR	208	669	850	775	450	65	6
225/75R15	102/99Q	6PR	223	719	850	775	350	50	6
215/75R15	100/97Q	6PR	216	703	800	730	350	50	6
235/75R15	104/101Q	6PR	235	733	900	825	350	50	6 1/2
245/70R16	113/110Q	8PR	248	750	1150	1060	450	65	7
245/75R16	120/116Q	10PR	248	774	1400	1250	550	80	7
265/70R16	121/118Q	10PR	272	778	1450	1320	550	80	8
265/75R16	123/120Q	10PR	267	804	1550	1400	550	80	7 1/2
265/65R17	120/117Q	10PR	272	776	1400	1285	550	80	8
265/70R17	121/118Q	10PR	272	804	1450	1320	550	80	8
225/60R18	104/100Q	8PR	228	727	900	800	450	65	6 1/2
275/55R20	115/112Q	8PR	284	810	1400	1285	550	80	8 1/2
285/50R20	119/116Q	8PR	297	794	1360	1250	550	80	9
31X10.50R15LT	109Q	6PR	268	775	1030	/	350	50	8 1/2

 Tire introduction


- FIGHTER A/T series has excellent performance for multi road conditions. The whole design offers efficient water drainage and enhance vehicle performance on both on and off roads. Aggressive sidewall protections increase off-road bite and prevent damage from sidewall cut and abrasions.

 Main feature



FOUR LONGITUDINAL GROOVES

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.



UNEQUAL PITCH ARRANGEMENT

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.



DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

The block tread design with mutiplesipes provide outstanding off-road traction and reduce tread damage on off-road condition.



COMPOUND TREAD

Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



White side
white letter

WHITE LETTER



L188



SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE		DOUBLE			
145/70R12	69	T	4.50B	150	509	325	716	/	/	300	44
155/70R12	73	T	4.50B	157	523	365	805	/	/	300	44
165/70R12	77	T	5.00B	170	537	412	908	/	/	300	44
175/70R12	80	T	5.00B	177	551	450	992	/	/	300	44
165/65R13	77	T	5.00B	170	544	412	908	/	/	300	44
185/65R14	86	H	5 1/2	189	596	530	1168	/	/	300	44
205/75R14	95	T	5 1/2J	203	664	690	1521	/	/	300	44
195/65R15	91	V	6J	201	635	615	1356	/	/	300	44
225/70R15	100	T	6 1/2J	228	697	800	1764	/	/	300	44
205/75R15	97	T	5 1/2J	203	689	730	1609	/	/	300	44
215/75R15	100	T	6J	216	703	800	1764	/	/	300	44
225/75R15	102	T	6J	223	719	850	1874	/	/	300	44
235/75R15	105	T	6 1/2J	235	733	925	2039	/	/	300	44
215/60R16	95	H	6 1/2J	221	664	690	1521	/	/	300	44
205/65R16	95	T	6.00B	209	672	690	1521	/	/	300	44

L200 ELEPHANT

SIZE	P.R	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
							SINGLE		DOUBLE			
5.00R12LT	10PR	87/85	K	3.50B	143	568	545	1201	515	1135	450	65
185R14C	8PR	102/100	R	5 1/2J	188	650	850	1874	800	1764	450	65
195R14C	8PR	106/104	R	5 1/2J	198	666	950	2094	900	1984	450	65
195R15C	8PR	106/104	R	5 1/2J	198	690	950	2094	900	1984	450	65
195/70R15C	8PR	104/102	R	6J	201	655	900	1984	850	1874	450	65
205/70R15C	8PR	106/104	R	6J	209	669	950	2094	900	1984	450	65
215/70R15C	8PR	109/107	R	6 1/2J	221	683	1030	2271	975	2149	450	65
225/70R15C	8PR	112/110	R	6 1/2J	228	697	1120	2469	1060	2337	450	65

L550 PUMA

SIZE	LOAD INDEX	SPEED INDEX	RIM	S.W. mm	O.D. mm	MAX LOADING				MAX PRESSURE	
						SINGLE		DOUBLE			
215/70R16	100	T	6 1/2J	708	221	800	1764	/	/	300	44
215/60R17	96	V	6 1/2J	690	221	710	1565	/	/	300	44
225/65R17	102	V	6 1/2J	724	228	850	1874	/	/	300	44

Private
Custom tires



LENSTON



CUSTOMIZE

Exclusive Customization

Exclusive Customization; Personalized Colors

Fashionable and Classy

Multi-color Luminescence; Flowing Light and Shadow; Come and become an awesome hipster with the colored sidewall of your tire

Wear-Resistant and Fuel-Efficient

Better Wear-resistance; Lower Rolling Resistance; Fuel-efficient; Cool and Practical

Excellent User-Experience

Safer; Precise Handling; Superior anti-skid ability; Lower Noise

