



TRIMPSON



PRODUCT CATALOG



TRIMPSON TYRE CO., LTD

Address: Room 2206-2207, Building 4, No.1 Xiangling Road,
Laoshan District, Qingdao, China

E-mail: info@trmpsontyre.com

Website: www.trmpsontyre.com

Tel: +86 0532-88903988

TRIMPSON TYRE CO., LTD



COMPANY INTRODUCTION

TRMPSON TYRE CO., LTD is a rapidly expanding enterprise dedicated to the global export of premium passenger car radial tyres. Specializing in R&D, production, and sales, we provide high-performance semi-steel radial tyres designed for the modern automotive industry.

We offer a comprehensive product lineup including HP, UHP, SUV/CUV, All-Season, Winter, and AT patterns. Each tyre is meticulously engineered to deliver consistent performance and durability, ensuring optimal handling on city streets, highways, and diverse off-road conditions.

Compliance and quality are non-negotiable. All products meet strict international safety regulations and hold key certifications such as DOT, ECE, EUR117, GCC, and CCC. By prioritizing market research and customer-centric service, we exercise full oversight of product standards and testing to stay ahead of market trends.

Currently serving clients in over 70 countries across Europe, the Middle East, South America, and beyond, TRMPSON is more than a manufacturer—we are your reliable partner. We invite you to explore a long-term collaboration with a brand built on trust and performance.



PRODUCT LIST



COMF TR107



LUXE TR188



VANX TR550



VANT TR200



ALL-TERRAIN TR77



RAY TR99



ALL-TERRAIN TR88



AURA TR66



L-35



NT9



SNOW TR818



ICE TR877



SNOW TR808



WINTER TR888



WHITE RING TIRE



DEVELOPING

COMF TR107

HIGH PERFORMANCE TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



FOUR OPTIMAL WIDE GROOVES

Four optimal wide grooves provide better drainage performance on mud road, prevent side sliding efficiently, improve the wet traction performance effectively



CAP PLY CONTINUOUS RIB

Directional continuous rib at the center of the cap ply ensures the straight line stability of the tire



WIDE TREAD DESIGN

Enlarge landing area, keep stable and improve wear resistance



DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

It is good to improve the tire drainage, maintain better grip, and increase the safety of braking

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
165/65R13	77	T	5.00B	170	544	412	300	420 A A
175/60R13	77	H	5.00B	177	540	412	300	420 A A
175/70R13	82	H	5.00B	177	576	475	300	420 A A
185/70R13	86	T	5.50B	189	590	530	300	420 A A
165/65R14	79	T	5J	170	570	437	300	420 A A
175/65R14	82	H	5J	177	584	475	300	420 A A
175/70R14	84	H	5J	177	602	500	300	420 A A
185/65R14	86	H	5½J	189	596	530	300	420 A A
185/70R14	88	H	5½J	189	616	560	300	420 A A
205/60R15	91	V	6J	209	627	615	300	420 A A
185/60R15	84	H	5½J	189	603	500	300	420 A A
195/55R15	85	V	6J	201	595	515	300	420 A A
195/50R15	82	V	6J	201	577	475	300	420 A A
195/60R15	88	V	6J	201	615	560	300	420 A A
195/65R15	91	V	6J	201	635	615	300	420 A A
185/65R15	88	H	5½J	189	621	560	300	420 A A
205/55R16	91	V	6½J	214	632	615	300	420 A A
195/55R16	87	V	6J	201	620	545	300	420 A A
205/60R16	92	V	6J	209	652	630	300	420 A A
215/60R16	95	V	6½J	221	664	690	300	420 A A
205/50ZR17	93	W	6½J	214	638	650	340	420 A A
225/55ZR17	97	W	7J	233	680	730	300	420 A A
215/55ZR17	98	W	7J	226	668	750	340	420 A A
215/60R17	96	H	6½J	221	690	710	300	420 A A
225/65R17	102	H	6½J	228	724	850	300	420 A A
215/50ZR17 XL	95	W	7J	226	648	690	340	420 A A
205/55R17	91	W	6½J	214	658	615	300	420 A A
225/55ZR18 XL	102	W	7J	233	705	850	340	420 A A
215/55ZR18 XL	99	W	7J	226	693	775	340	420 A A
225/60R18 XL	104	V	6½J	228	727	900	340	420 A A
235/60R18 XL	107	V	7J	240	739	975	340	420 A A
215/50R18	92	V	7J	226	673	630	300	420 A A

LUXE TR188

HIGH PERFORMANCE TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



FOUR OPTIMAL WIDE GROOVES

Four optimal wide grooves provide better drainage performance on mud road, prevent side sliding efficiently, improve the wet traction performance effectively



WIDE TREAD DESIGN

Enlarge landing area, keep stable and improve wear resistance



LOW NOISE FORMULA

Low noise formula effectively reduce the noise when driving



GREEN TREAD FORMULA

The green tread can reduce the rolling resistance coefficient, make it more environment-friendly and fuel saving, and bring you pleasant driving pleasure

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
145/70R12	69	T	4.50B	150	509	325	300	440 A A
155/70R12	73	T	4.50B	157	523	365	300	440 A A
165/70R12	77	T	5.00B	170	537	412	300	440 A A
175/70R12	80	T	5.00B	177	551	450	300	440 A A
165/55R13	70	T	5.00B	170	512	335	300	440 A A
165/65R13	77	T	5.00B	170	544	412	300	440 A A
175/65R13	80	T	5.00B	177	558	450	300	440 A A
185/65R14	86	H	5½J	189	596	530	300	440 A A
205/75R14	95	T	5½J	203	664	690	300	440 A A
195/65R15	91	V	6J	201	635	615	300	440 A A
205/75R15	97	T	5½J	203	689	730	300	440 A A
205/65R16	95	T	6.00B	209	672	690	300	440 A A
215/60R16	95	H	6½J	221	664	690	300	440 A A
215/75R15	100	T	6J	216	703	800	300	440 A A
225/70R15	100	T	6½J	228	697	800	300	440 A A
225/75R15	102	T	6J	233	719	850	300	440 A A
235/75R15	105	T	6½J	235	733	925	300	440 A A



VANX TR550

OFF-ROAD/SUV TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE




NON-DIRECTIONAL BLOCK DESIGN

Non-directional block design for improved grip



VARIABLE PITCH DESIGN

Variable pitch design reduces road noise and provides a more comfortable ride



HIGH-STRENGTH BELT

The high-strength belt layer is used to improve the impact resistance of the tire



HIGH STRENGTH APEX

High-strength apex, giving the tire a higher stability and steering response

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
215/70R16	100	T	6½J	221	708	800	300	400 A A
215/60R17	96	V	6½J	221	690	710	300	400 A A
225/65R17	102	V	6½J	228	724	850	300	400 A A





VANT TR200

LIGHT TRUCK TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



THREE WINDING SIPES

Enhance water evacuation, improve traction in wet condition with the design of lateral block pattern



WIDE TREAD DESIGN

Enlarge landing area, keep stable and improve wear resistance



TIRE CARCASS REINFORCE

Reinforce carcass structure and adopt special formula, to achieve excellent load capacity and be more economic



NEW RUBBER FORMULA

Provide better wear resistance, save energy and more environmental

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)
5.00R12LT	88/86	P	10PR	3.50B	143	568	560/530	450
LT155R12C	83/81	N	6PR	4.50B	157	553	487/462	350
LT165R13C	91/89	P	6PR	4.50B	165	594	615/580	375
LT175R13C	97/95	Q	8PR	5.00B	177	610	730/690	450
LT165R14C	93/91	P	6PR	4½J	165	620	650/615	375
LT175/70R14C	95/93	S	8PR	5J	177	602	690/650	450
LT185R14C	102/100	R	8PR	5½J	189	652	850/800	450
LT195R14C	106/104	R	8PR	5½J	196	668	950/900	450
LT205R14C	109/107	Q	8PR	6J	208	686	1030/975	450
LT195R15C	106/104	R	8PR	5½J	196	693	950/900	450
LT195/70R15C	104/102	R	8PR	6J	201	655	900/850	450
LT205/70R15C	106/104	R	8PR	6J	209	669	950/900	450
LT215/70R15C	109/107	R	8PR	6½J	221	683	1030/975	450
LT225/70R15C	112/110	R	8PR	6½J	228	697	1120/1060	450

ALL-TERRAIN TR77

OFF-ROAD/SUV TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



FOUR LONGITUDINAL GROOVES

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions



UNEQUAL PITCH ARRANGEMENT

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.



DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

The block tread design with multiplesipes provide outstanding off-road traction and reduce tread damage on off-road condition



COMPOUND TREAD

Lointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
175/80R14/BZ	92	T		5 J	177	636	630	340	400 A B
185/70R14/BZ	88	T		5½ J	189	616	560	300	400 A B
195/65R15/BZ	91	H		6 J	201	635	615	300	400 A B
205/65R15/BZ	94	H		6 J	209	647	670	300	400 A B
205/70R15/BZ	94	H		6 J	209	669	710	300	400 A B
31X10.5R15LT/BZ	109	S	6PR	8½ J	268	775	1030	350	
265/70R16/BZ	112	T		8J	272	778	1120	300	400 A B
265/60R18/BZ	110	T		8J	272	775	1060	300	400 A B
265/50R20/BZ	107	H		8½J	277	774	975	300	400 A B



RAY TR99



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



OPTIMIZED ASYMMETRIC PATTERN

Optimized asymmetric pattern provide better performance for controlling and drainage in all road condition



FOUR OPTIMAL WIDE GROOVES

Four optimal wide grooves provide better drainage performance on mud road, prevent side sliding efficiently, improve the wet traction performance effectively



LOW NOISE FORMULA

Low noise formula effectively reduce the noise when driving



RIM PROTECTION DESIGN

Rim protection design avoid the curb rubbing the rim

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
225/55ZR16 XL	99	W	7J	233	654	775	340	420 A A
225/55ZR16 XL/RF	99	W	7J	233	654	775	340	420 A A
205/50R17 XL	93	W	6.5J	214	638	650	340	440 A A
215/45R17 XL	91	W	7J	213	626	615	340	440 A A
215/50R17 XL	95	W	7J	226	648	690	340	440 A A
215/55ZR17 XL	98	W	7J	226	668	750	340	420 A A
225/45R17 XL	94	W	7½J	225	634	670	340	420 A A
225/45R17 XL/RF	94	W	7½J	225	634	670	340	420 A A
225/50ZR17 XL	98	W	7J	233	658	750	340	420 A A
225/50ZR17 XL/RF	98	W	7J	233	658	750	340	420 A A
225/55ZR17 XL	101	W	7J	233	680	825	340	420 A A
225/55ZR17 XL/RF	101	W	7J	233	680	825	340	420 A A
235/45R17 XL	97	W	8J	236	644	730	340	440 A A
235/55R17 XL	103	W	7½J	245	690	875	340	440 A A
245/45ZR17 XL	99	W	8J	243	652	775	340	420 A A
235/50ZR17 XL	100	W	7½J	245	668	800	340	420 A A
245/40ZR18 XL	97	W	8½J	248	653	730	340	420 A A
245/40ZR18 XL/RF	97	W	8½J	248	653	730	340	420 A A
245/45ZR18 XL	100	W	8J	243	677	800	340	420 A A
245/45ZR18 XL/RF	100	W	8J	243	677	800	340	420 A A
225/45ZR18 XL	95	W	7½J	225	659	690	340	420 A A
225/45ZR18 XL/RF	95	W	7½J	225	659	690	340	420 A A
255/45ZR18 XL	103	W	8½J	255	687	875	340	420 A A
255/45ZR18 XL/RF	103	W	8½J	255	687	875	340	420 A A
225/40ZR18 XL	92	W	8J	230	637	630	340	420 A A
225/40ZR18 XL/RF	92	W	8J	230	637	630	340	420 A A
235/40ZR18 XL	95	W	8½J	241	645	690	340	420 A A
235/45ZR18 XL	98	W	8J	236	669	750	340	420 A A
215/45ZR18 XL	93	W	7J	213	651	650	340	420 A A
255/40ZR18 XL	99	W	9J	260	661	775	340	420 A A
255/40ZR18 XL/RF	99	W	9J	260	661	775	340	420 A A
245/45ZR19 XL	102	W	8J	243	703	850	340	420 A A
245/45ZR19 XL/RF	102	W	8J	243	703	850	340	420 A A
235/35ZR19 XL	91	W	8½J	241	647	615	340	420 A A
235/40ZR19 XL	96	W	8½J	241	671	710	340	420 A A
225/40ZR19 XL	93	W	8J	230	663	650	340	420 A A
225/45ZR19 XL	96	W	7½J	225	685	710	340	420 A A
245/40ZR19 XL	98	W	8½J	248	679	750	340	420 A A
245/40ZR19 XL/RF	98	W	8½J	248	679	750	340	420 A A
255/40ZR19 XL	100	W	9J	260	687	800	340	420 A A
255/40ZR19 XL/RF	100	W	9J	260	687	800	340	420 A A
275/40ZR19 XL	105	W	9½J	278	703	925	340	420 A A
275/40ZR19 XL/RF	105	W	9½J	278	703	925	340	420 A A
255/45ZR19 XL	104	W	8½J	255	713	900	340	420 A A
275/45ZR19 XL	108	W	9J	273	731	1000	340	420 A A
275/40R20 XL	106	W	9½J	278	728	950	340	420 A A
245/45ZR20 XL	103	W	8J	243	728	875	340	420 A A
255/45ZR20 XL	105	W	8½J	255	738	925	340	420 A A
255/45ZR20 XL/RF	105	W	8½J	255	738	925	340	420 A A
275/45ZR21 XL	110	W	9J	273	781	1060	340	420 A A



ALL-TERRAIN TR88

HIGH PERFORMANCE TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



FOUR OPTIMAL WIDE GROOVES

Four main circumferential grooves combined with rigid tread pattern layout deliver excellent traction on both paved and unpaved roads



IRREGULAR GROOVE DESIGN

Irregular groove design effectively reduces tire noise



RIGID CORRUGATED GROOVE DESIGN

The rigid wave-shaped grooves ensure outstanding traction under all road conditions



IRREGULAR TREAD BLOCK DESIGN

Tread blocks in varied sizes and shapes further boost driving force

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
245/70R16	107	T	4PR	7J	248	750	975	300	460 A A
235/70R16	106	H	4PR	7J	240	736	950	300	460 A A
275/70R16	114	H	4PR	8J	279	792	1180	300	460 A A
265/70R16	112	T	4PR	8J	272	778	1120	300	460 A A
245/65R17	107	H	4PR	7J	248	750	975	300	460 A A
285/65R17	116	H	4PR	8.5J	292	802	1250	300	460 A A
275/65R17	115	T	4PR	8J	279	790	1215	300	460 A A
265/65R17	112	T	4PR	8J	272	776	1120	300	460 A A
285/60R18	116	H	4PR	8.5J	292	799	1250	300	460 A A
265/60R18	110	H	4PR	8J	272	775	1060	300	460 A A

AURA TR66

HIGH PERFORMANCE TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



FOUR OPTIMAL WIDE GROOVES

Four longitudinal grooves as the mainstream design of UHP tire, totally improve tire rapid drainage performance.



ASYMMETRIC PATTERN DESIGN

Inside pattern with fine and smooth features, provide comfort and low noise performance. Outside pattern with rough features, bear the handling stability and rigid



FULL STRAIGHT LINE GROOVES DESIGN

Vertical Renoir design with solid sence



UNEQUAL INTERCEPT DESIGN

Five unequal intercept with the biggest difference array, meanwhile with different width, greatly decrease rolling resonance, noise and early damage

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
215/55ZR16	97	W	4PR	7J	226	642	730	340	420 A A
215/70R16	100	H	4PR	6½J	221	708	800	300	420 A A
225/70R16	103	H	4PR	6½J	228	722	875	300	420 A A
205/45ZR17	88	W	4PR	7J	206	616	560	340	420 A A
215/45ZR17	91	W	4PR	7J	213	626	615	340	420 A A
225/45ZR17	94	W	4PR	7½J	225	634	670	340	420 A A
225/45ZR17/RF	94	W	4PR	7½J	225	634	670	340	420 A A
225/55ZR17/RF	97	W	4PR	7J	233	680	730	300	420 A A
225/60R17	99	H	4PR	6½J	228	702	775	300	420 A A
225/60R17/RF	99	H	4PR	6½J	228	702	775	300	420 A A
235/45ZR17	97	W	4PR	8J	236	644	730	340	420 A A
235/50ZR17	100	W	4PR	7½J	245	668	800	340	420 A A
235/65R17	104	H	4PR	7J	240	738	900	300	420 A A
265/65R17	112	H	4PR	8J	272	776	1120	300	420 A A
215/50R18	92	V	4PR	7J	226	673	630	300	420 A A
245/40ZR18	97	W	4PR	8½J	248	653	730	340	420 A A
245/45ZR18	100	W	4PR	8J	243	677	800	340	420 A A
245/45ZR18/RF	96	W	4PR	8J	243	677	710	300	420 A A
255/40ZR18	99	W	4PR	9J	260	661	775	340	420 A A
255/40ZR18/RF	99	W	4PR	9J	260	661	775	340	420 A A
255/50ZR18	106	W	4PR	8J	265	713	950	340	420 A A
255/55R18	105	V	4PR	8J	265	737	925	250	420 A A
255/55R18/RF	105	V	4PR	8J	265	737	925	250	420 A A
265/60R18	110	H	4PR	8J	272	775	1060	300	400 A A
225/40ZR19	93	W	4PR	8J	230	663	650	340	420 A A
225/40ZR19/RF	89	W	4PR	8J	230	663	580	300	420 A A
225/45ZR19	96	W	4PR	7½J	225	685	710	340	420 A A
225/45ZR19/RF	96	W	4PR	7½J	225	685	710	340	420 A A
235/40ZR19	96	W	4PR	8½J	241	671	710	340	420 A A
235/50ZR19	103	W	4PR	7½J	245	719	875	290	420 A A
245/40ZR19/RF	98	W	4PR	8½J	248	679	750	340	420 A A
245/50ZR19	105	W	4PR	7½J	253	729	925	340	420 A A

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
245/50ZR19/RF	101	W	4PR	7½J	253	729	825	300	420 A A
245/55ZR19	103	W	4PR	7½J	253	753	875	300	420 A A
255/35ZR19	96	W	4PR	9J	260	661	710	340	420 A A
255/35ZR19/RF	96	W	4PR	9J	260	661	710	340	420 A A
255/45ZR19	104	W	4PR	8½J	255	713	900	340	420 A A
255/50ZR19/RF	103	W	4PR	8J	265	739	875	250	420 A A
265/50ZR19	110	W	4PR	8½J	277	749	1060	290	420 A A
235/45ZR20	100	W	4PR	8J	236	720	800	340	420 A A
235/50ZR20	104	W	4PR	7½J	249	739.4	900	340	420 A A
245/40ZR20	99	W	4PR	8½J	248	704	775	290	420 A A
245/40ZR20/RF	99	W	4PR	8½J	248	704	775	290	420 A A
265/40ZR20	104	W	4PR	9½J	271	720	900	340	420 A A
275/30ZR20	97	W	4PR	9½J	278	674	730	340	420 A A
275/30ZR20/RF	97	W	4PR	9½J	278	674	730	340	420 A A
275/45ZR20/RF	110	W	4PR	9J	273	756	1060	290	420 A A
275/50ZR20/RF	113	W	4PR	8½J	284	784	1150	290	420 A A
285/45ZR20	112	W	4PR	9½J	285	764	1120	340	420 A A
315/35ZR20/RF	110	W	4PR	11J	320	728	1060	290	420 A A
255/40ZR21	102	W	4PR	9J	260	737	850	340	420 A A
255/45ZR21	105	W	4PR	8½J	270	758	925	340	420 A A
265/40ZR21	105	W	4PR	9½J	271	745	925	340	420 A A
275/40ZR21	107	W	4PR	9½J	278	753	975	340	420 A A
275/45ZR21	107	W	4PR	9J	273	781	975	300	420 A A
275/50ZR21	113	W	4PR	8½J	276	800.4	1150	340	420 A A
295/40ZR21	111	W	4PR	10½J	301	769	1090	340	420 A A
315/35ZR21	111	W	4PR	11J	320	753	1090	340	420 A A
265/40ZR22	106	W	4PR	9½J	271	771	950	340	420 A A
275/40ZR22	108	W	4PR	9½J	278	772.2	1000	340	420 A A
285/35ZR22	106	W	4PR	10J	290	759	950	340	420 A A
315/35ZR22	111	W	4PR	11J	323	771.2	1090	340	420 A A

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
285/40ZR23	111	W	4PR	10J	290	812	1090	340	420 A A
195/50R16	84	V	4PR	6J	201	602	500	300	420 A A
225/55ZR16	99	W	4PR	7J	233	654	775	340	420 A A
205/40ZR17 XL	84	W	4PR	7½J	212	596	500	340	420 A A
235/55ZR17 XL	103	W	4PR	7½J	245	690	875	340	420 A A
235/50ZR18 XL	101	W	4PR	7½J	245	693	825	340	420 A A
235/55ZR18 XL	104	W	4PR	7½J	245	715	900	340	420 A A
255/35ZR18 XL	94	W	4PR	9J	260	635	670	340	420 A A
265/35ZR18 XL	97	Y	4PR	9½J	271	643	730	340	420 A A
225/35ZR19 XL	88	W	4PR	8J	230	641	560	340	420 A A
225/55R19	99	V	4PR	7J	233	731	775	300	420 A A
235/55ZR19	105	W	4PR	7½J	245	741	925	340	420 A A
235/55ZR19/RF	105	W	4PR	7½J	245	741	925	340	420 A A
245/35ZR19 XL	93	W	4PR	8½J	248	655	650	340	420 A A
245/40ZR19	98	W	4PR	8½J	248	679	750	340	420 A A
255/50ZR19	103	W	4PR	8J	265	739	875	250	420 A A
255/55ZR19	111	W	4PR	8J	265	763	1090	340	420 A A
235/35ZR20 XL	92	W	4PR	8½J	241	672	630	340	420 A A
235/55ZR20	105	W	4PR	7½J	245	766	925	340	420 A A
245/30ZR20	90	W	4PR	8½J	248	656	600	340	420 A A
245/35ZR20 XL	95	W	4PR	8½J	248	680	690	340	420 A A
245/45ZR20	103	W	4PR	8J	243	728	875	340	420 A A
245/50ZR20	102	W	4PR	7½J	253	754	850	300	420 A A
255/40ZR20	101	W	4PR	9J	260	712	825	290	420 A A
255/50ZR20	109	W	4PR	8J	265	764	1030	290	420 A A
255/55ZR20	110	W	4PR	8J	265	788	1060	340	420 A A
265/50R20	107	V	4PR	8½J	277	774	975	300	420 A A
275/45ZR20	110	W	4PR	9J	273	756	1060	290	420 A A
275/50ZR20	113	W	4PR	8½J	284	784	1150	290	420 A A
315/35ZR20	110	W	4PR	11J	320	728	1060	290	420 A A





OFF-ROAD/SUV TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



UNEQUAL PITCH ARRANGEMENT

Asymmetric Pitch: Reduces resonance & noise; enhances comfort




DIVERSITY OF FINE STEEL SHEETS AND TRANSVERSAL GROOVES

Diverse Sipes & Large Blocks: Improves drainage, grip, & braking safety



WIDE TREAD DESIGN

Wide Tread: Larger contact patch for stability & wear resistance



COMPOUND TREAD

Compound Formula: Lowers rolling resistance; boosts fuel efficiency

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
255/40ZR18	99	W	9J	260	661	775	340	300 A A
245/45ZR18	100	W	8J	243	677	800	340	300 A A
255/55ZR18	109	W	8J	265	737	1030	340	300 A A
265/60ZR18	114	W	8J	272	775	1180	340	300 A A



NT9

OFF-ROAD/SUV TIRE SERIES



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



A MANIFOLD OF OVERLAPPING THREAD PATTERNS

Optimized Cross Blocks: Superior handling & high-speed comfort



CONTINUOUS CAP PLY

Continuous Belt Layer: Ensures high-speed durability



Dense Siping · Multi-Pitch Variation

Fine Sipes & Variable Pitch: Optimizes footprint pressure; balances comfort/handling & noise reduction




WIDE DEEP GROOVES · CONTINUOUS TREAD SIPES

Deep Wide Grooves: Excellent wet drainage & traction; ideal for urban/rural roads

PRODUCT SPECIFICATIONS

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
275/40R18 XL	103	V	9½J	236	677	875	340	320 AA A
245/45R18	100	V	8J	243	677	800	340	320 AA A
265/50R20 XL	111	V	8½J	277	774	1090	340	320 AA A
255/50R18 XL	106	V	8J	265	713	950	340	320 AA A
255/55R18 XL	109	V	8J	265	737	1030	340	320 AA A
265/60R18 XL	114	V	8J	272	775	1180	340	320 AA A

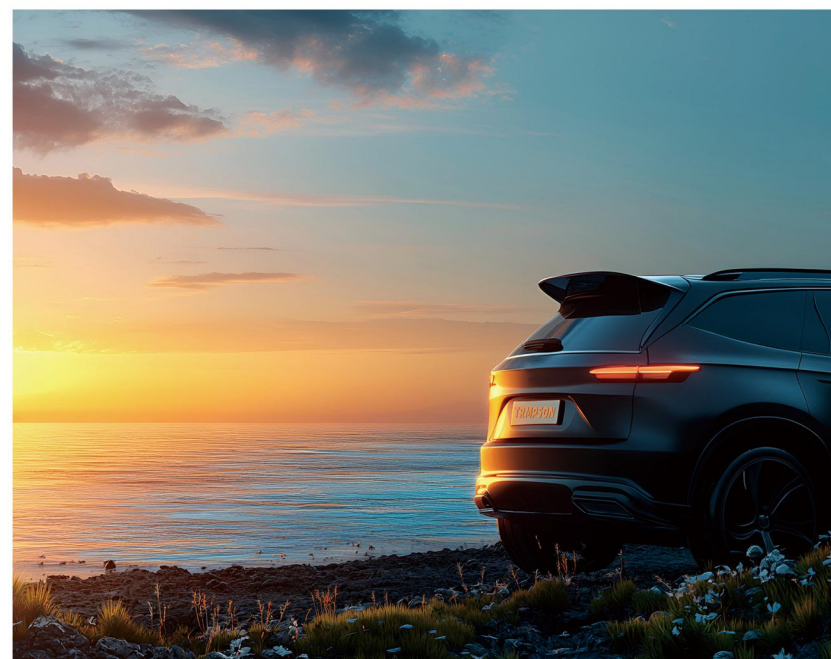



SNOW TR808



PRODUCT FEATURES

Comfort	★★★★★
Wet Grip	★★★★★
Dry Handling	★★★★★
Wear Resistance	★★★★★
Water Evacuation	★★★★★
Noise Performance	★★★★★

MAIN FEATURE



STRAIGHT - GROOVE + DENSE SIPES

Stable driving on ice, snow, and muddy roads



DEEPEMED GROOVES

Rapidly expels snow, gravel, and meltwater; prevents skidding/tail - sliding



HIGH - STRENGTH CARCASS + WEAR - RESISTANT RUBBER + THICKENED SIDEWALL

Resists abrasion, reduces blowout risk for efficient freight transport



SPECIAL SNOW - OPTIMIZED COMPOUND

Maintains softness in extreme cold, increases friction coefficient for strong traction/braking

PRODUCT SPECIFICATIONS

Tire Size	Speed Grade	Standard Rim	SW (mm)	OD (mm)	MAX LOADING	Inflation Pressure
					SINGLE	
175/70R14	84T	5J	177	602	500	300
205/55R17	95T	6½J	214	658	690	340
235/55R20	105T	7½J	245	766	925	340
235/70R16	106T	7J	240	736	950	300
185/65R15	88T	5½J	189	621	560	300
185/60R15	84T	5½J	189	603	500	300
195/60R15	88T	6J	201	615	560	300
215/60R16	95T	6½J	221	664	690	300
245/45R19	98T	8J	243	703	750	300
245/45R18	96T	8J	243	677	710	300
255/55R20	110T	8J	265	788	1060	340
235/60R19	107T	7J	248	756	975	340
255/55R19	111T	8J	265	763	1090	340
245/60R18	105H	7J	248	751	925	300
245/50R20	102H	7½J	253	754	850	300
235/50R19	103T	7½J	245	719	875	340
225/45R18	91T	7½J	225	659	615	300
215/55R16	93H	7J	226	642	650	300
235/55R19	101H	7½J	245	741	825	300
235/55R17	99H	7½J	245	690	775	300
245/55R19	103T	7½J	253	753	875	300
255/50R20	105T	8J	265	764	925	300
225/50R18	95T	7J	233	683	690	300
225/45R17	91T	7½J	225	634	615	300
235/60R18	103S	7J	240	739	875	300
215/55R17	94T	7J	226	668	670	300
255/60R19	109T	7½J	260	789	1030	300
265/60R18	114T	8J	272	775	1180	340
195/65R15	91T	6J	201	635	615	300
205/50R17 XL	93H	6½J	214	638	650	340
205/55R16	91T	6½J	214	632	615	300
205/60R16	92T	6J	209	652	630	300
215/50R17 XL	95T	7J	226	648	690	340
235/65R17	104T	7J	240	738	900	300
215/50R18 XL	96T	7J	226	673	710	340
235/40R19 XL	96H	8½J	241	671	710	340
215/65R16	98T	6½J	221	686	750	340
225/55R17	97T	7J	233	680	730	300
225/60R17	99T	6½J	228	702	775	300
225/55R18 XL	102H	7J	233	705	850	340
225/60R16	98T	6½J	228	676	750	300
235/50R20 XL	104H	7½J	247	741	900	340
245/45R20 XL	103T	8J	243	728	875	340
245/70R16	107T	7J	248	750	975	300
265/45R21	104H	9J	266	771	900	300
255/45R20 XL	105T	8½J	255	738	925	340
265/65R17	112T	8J	272	776	1120	300

ICE TR877



TREAD WITH DENSE SIPES

Improves traction

MULTIPLE WIDE LONGITUDINAL GROOVES + LATERAL GROOVES

Quickly expels snow/gravel; reduces snow blockage on ice

REINFORCED SIDEWALL

Enhances wear/impact resistance

SPECIALLY FORMULATED WINTER RUBBER COMPOUND

Perfectly combines handling & braking

Tire Size	Speed Grade	Standard Rim	Ply	SW (mm)	OD (mm)	MAX LOADING		Inflation Pressure
						SINGLE	DOUBLE	
175/65R14C	90/88T	5J	6PR	177	584	600	560	375
205/70R15C	106/104R	6J	8PR	209	669	950	900	450
225/70R15C	112/110R	6½J	8PR	228	697	1120	1060	450
195/60R16C	99/97T	6J	8PR	201	640	775	730	375
215/60R16C	108/106T	6½J	8PR	221	664	100	950	475
215/75R16C	113/111R	6J	8PR	216	728	1150	1090	475
225/75R16C	121/120R	6J	12PR	223	744	1450	1400	575

WINTER TR888



Tread with dense sipes

Improves traction

Four longitudinal grooves + continuous, shoulder - widening grooves

Superior snow - expulsion performance

Shoulder - angled blocks

Prevents skidding during turns; optimized shoulder blocks + small absorption holes enhance ice/wet - road traction

Low - temp ultra - soft compound

Strong ice/snow traction, improves braking for safe driving

Tire Size	Speed Grade	Standard Rim	SW (mm)	OD (mm)	MAX LOADING		Inflation Pressure
					SINGLE	DOUBLE	
255/45R21	102T	8½J	254	759	850		300
275/45R21	110T XL	9J	273	781	1060		340
275/50R21	113T XL	8½J	278	808	1150		340

SNOW TR818



Dense groove pattern

Greatly enhances ice/snow traction, shortens braking distance.

Wide & deep directional grooves

Rapidly expels snow, prevents tire slip.

Groove - block transition structure

Reduces snow clogging, maintains stable traction.

Specially formulated winter rubber compound

Perfectly combines handling & braking.

Tire Size	速级	Standard Rim	SW (mm)	OD (mm)	MAX LOADING		Inflation Pressure
					SINGLE	DOUBLE	
195/65R15	91T	6J	201	635	615		300
215/75R15	100S	6J	216	703	800		300
235/75R15	105T	6½J	235	733	925		300
205/55R16	91T	6½J	214	632	615		300
225/55R16	95T	7J	233	654	690		300
195/60R16	89T	6J	201	640	580		300
215/70R16	100T	6½J	221	708	800		300
265/70R16	112T	8J	272	778	1120		300
225/50R17	94H	7J	233	658	670		300
215/60R17	96H	6½J	221	690	710		300
225/65R17	106H XL	6½J	228	724	850		300
235/45R18	94H	8J	236	669	670		300
215/55R18	95T	7J	226	693	690		300
235/55R18	104H XL	7½J	245	715	900		340
225/60R18	100T	6½J	228	727	800		300
285/60R18	116S	8½J	292	800	1250		300
235/65R18	106T	7J	240	763	950		300
255/50R19	107H XL	8J	265	739	975		340
225/55R19	99T	7J	233	731	775		300
275/45R20	110H XL	9J	273	756	1060		340



WHITE RING TIRE

LUXE TR188

VANX TR550

VANT TR200



LUXE TR188

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
145/70R12/BZ	69	T	4.50B	150	509	325	300	440 A A
155/70R12/BZ	73	T	4.50B	157	523	365	300	440 A A
165/70R12/BZ	77	T	5.00B	170	537	412	300	440 A A
175/70R12/BH	80	T	5.00B	177	551	450	300	440 A A
175/70R12/BZ	80	T	5.00B	177	551	450	300	440 A A
165/65R13/BH	77	T	5.00B	170	544	412	300	440 A A
165/65R13/BZ	77	T	5.00B	170	544	412	300	440 A A
185/65R14/BH	86	H	5½J	189	596	530	300	440 A A
205/75R14/BH	95	T	5½J	203	664	690	300	440 A A
195/65R15/BH	91	V	6J	201	635	615	300	440 A A
195/65R15/BZ	91	V	6J	201	635	615	300	440 A A
215/75R15/BH	100	T	6J	216	703	800	300	440 A A
225/75R15/BH	102	T	6J	233	719	850	300	440 A A
225/70R15/BH	100	T	6½J	228	697	800	300	440 A A
235/75R15/BH	105	T	6½J	235	733	925	300	440 A A
215/60R16/BH	95	H	6½J	221	664	690	300	440 A A

VANX TR550

Tire Size	Load Index	Speed Level	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)	UTQG
215/70R16/BZ	100	T	6½J	221	708	800	300	400 A A
215/70R16/BH	100	T	6½J	221	708	800	300	400 A A
215/60R17/BZ	96	V	6½J	221	690	710	300	400 A A
215/60R17/BH	96	V	6½J	221	690	710	300	400 A A
225/65R17/BZ	102	V	6½J	228	724	850	300	400 A A
225/65R17/BH	102	V	6½J	228	724	850	300	400 A A

VANT TR200

Tire Size	Load Index	Speed Level	Ply	Standard Rim	SW (mm)	OD (mm)	Max. Load (kg)	Max. Pressure (kpa)
5.00R12LT/BZ	88/86	P	10PR	3.50B	143	568	560/530	450
5.00R12LT/BH	88/86	P	10PR	3.50B	143	568	560/530	450
LT185R14C/BZ	102/100	R	8PR	5½J	189	652	850/800	450
LT195R14C/BH	106/104	R	8PR	5½J	196	668	950/900	450
LT195R14C/BZ	106/104	R	8PR	5½J	196	668	950/900	450
LT195R15C/BH	106/104	R	8PR	5½J	196	693	950/900	450
LT195R15C/BZ	106/104	R	8PR	5½J	196	693	950/900	450
LT195/70R15C/BZ	104/102	R	8PR	6J	201	655	900/850	450
LT205/70R15C/BH	106/104	R	8PR	6J	209	669	950/900	450
LT205/70R15C/BZ	106/104	R	8PR	6J	209	669	950/900	450
LT215/70R15C/BH	109/107	R	8PR	6½J	221	683	1030/975	450
LT215/70R15C/BZ	109/107	R	8PR	6½J	221	683	1030/975	450
LT225/70R15C/BH	112/110	R	8PR	6½J	228	697	1120/1060	450
LT225/70R15C/BZ	112/110	R	8PR	6½J	228	697	1120/1060	450